

Instruction Guide for HD Lockdown - (HDLD) Rotatable (Patent pending)

Mechanical Security for iPhone - Removing Demo Device

(Code 880-018)



Removing the Demo Device:



1. Find the lock on the back of the HDLD. Find the matching key and insert it into the lock. The key will only fit in one way. This is the "home" position.



2. Turn the key to unlock the HDLD. You can go left or right. *NOTE: The key must be returned to the "home" position in order to be removed. Do not force it.*



3. The lock pin is out when it is unlocked.




4. Slide the top bracket out. Ensure that the top bracket is retained with this HDLD.



5. Unplug the charging cable from the demo device.



6. Slide the demo device out of the HDLD.

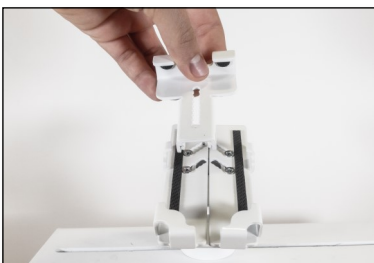

7. Slide the top bracket back into the HDLD to prevent it being misplaced.



8. Push the lock button in to lock the HDLD.