

## Instruction Guide for HD Lockdown - (HDL) (Patent pending)

### Mechanical Security for Smart Watches


(Code 730-014)



1. Locate HD Lockdown (HDL) assembled unit with washer plate, two wingnuts and a set of keys.




2. Insert the charging cable through the hole in the front of the HDLD. The cable end should come through the bottom of the HDLD.

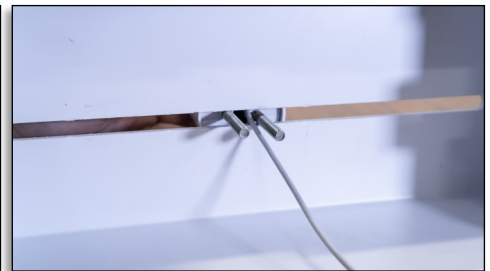

3. Set the HDLD into position on the display fixture.




4. Feed the charging cable through the center of the washer plate. Place the washer plate in position on the twin studs.

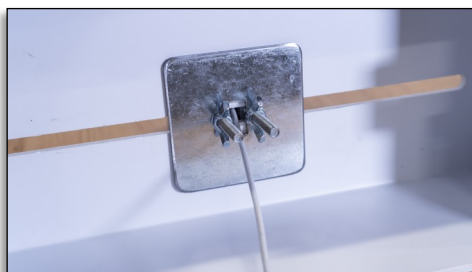

5. Tighten the two wingnuts on the twin studs to secure the HDLD in to position.



6. Find the lock on the back of the HDLD.

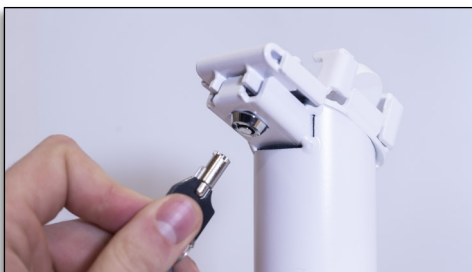

7. Find the matching key and insert it into the lock. The lock code can be found on the lock and on the key.



8. Turn the key to unlock the HDLD. You can go left or right. *NOTE: The key needs to be turned back to the "home" position in order to be removed. Do not force it.*



9. The lock pin is out when it is unlocked.



10. Remove the top bracket. Center the charger on the HDLD.




11. Slide the band of the watch through the bottom bracket. Center the watch face on the HDLD, over its charger.



12. Reinsert the top bracket.



13. Press the lock pin in to lock the HDLD's top bracket in place.

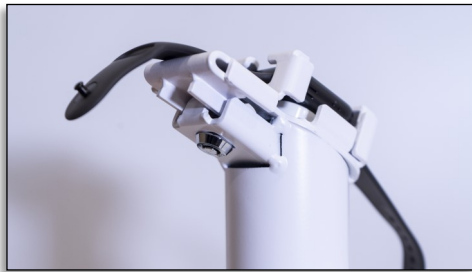

14. Verify that the lock pin is pressed and the top bracket will not slide out.



15. Feed any excess length of the charging cable down through the post into the fixture for cable management. The displayed device is now mechanically secured in the HDLD.